

ANCHOR IT EPOXY




- Outperforms 99% of all other Epoxy products.
- ICC, City of LA and NSF approved
- 20 oz gives you **4 more oz than Hilti**
- Sets in just 10 minutes
- Full cure in just **45 minutes** (pull test ready)
- 2:1 ratio cartridge fits in existing Hilti tools
- Approved for Cracked & Uncracked concrete
- Very low VOC
- Cost per oz is **25%-40% lower** than others
- Stocking locations nationwide
- **20+ Engineers on staff** to answer questions
- Use product overhead without dripping mess
- **Advanced software to assist Engineering**
- Can be used in wet or underwater applications



Creep


Gradual, permanent deformation produced by a continued application of heat or stress.

One of the measures of a superior adhesive is its ability to resist creep at elevated temperatures. ANCHOR-IT! is approved at one of the highest temperatures available in the market today.

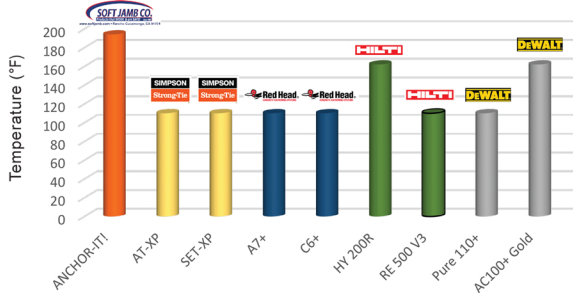


ANCHOR-IT! Bond vs. Steel Strength

Grade 36 Threaded Rod, 10d Embedment Depth

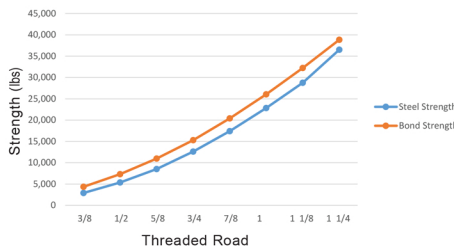

ANCHOR IT! Bond vs. Steel Strength (Grade 36 Threaded Rod), Uncracked Concrete, Dry Installation, No Seismic Loading, No Edge or Spacing Reductions, Single Anchor, 110 °F Long Term, 176 °F Short Term

Grade 40 Rebar, 16d Embedment Depth

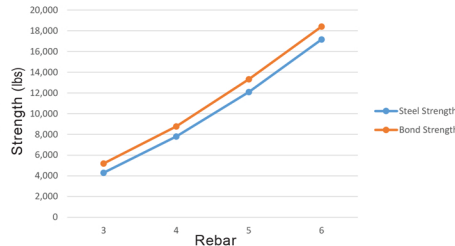

ANCHOR IT! Bond vs. Steel Strength (Grade 40 Rebar), Uncracked Concrete, Dry Installation, No Seismic Loading, No Edge or Spacing Reductions, Single Anchor, 110 °F Long Term, 176 °F Short Term



ICC/ESR Approved



EXPRESS FASTENERS INC.
10094 SIXTH STREET SUITE B
RANCHO CUCAMONGA, CA 91730

WWW.EXPRESSFASTENERSINC.COM
(909) 989-5557 | SALES@EXPRESSFASTENERSINC.COM